



AS-i Extension Plug Compact podwojenie długości przewodu do 200 m na interfejs AS-i Segment stopień ochrony IP67 podłączenie bezpośrednio do AS-i przewód płaski

Ogólne dane techniczne		
wykonanie produktu		AS-Interface Extension Plug Compact
Wykonanie typu slave		Brak integrowanego slave
napięcie robocze zg. ze specyfikacją AS Interface	V	26,5 ... 31,6
Przyłącza/ Zaciski		
Wykonanie podłączenia AS-Interface		Bezpośrednie podłączenie do przewodu wstążkowego AS-i
Warunki środowiska		
temperatura otoczenia podczas pracy	°C	-25 ... +70
Stopień ochrony IP		IP67
Aprobata/ Certyfikaty		

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)

Shipping Approval	other
-------------------	-------



[Confirmation](#)

Więcej informacji

Information- and Downloadcenter

<https://www.siemens.com/ic10>

Industry Mall (System zamawiania online)

<https://mall.industry.siemens.com/mall/pl/pl/Catalog/product?mfb=3RK1901-1MX02>

CAX-Online-Generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1901-1MX02>


Service&Support

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-1MX02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1901-1MX02&lang=en

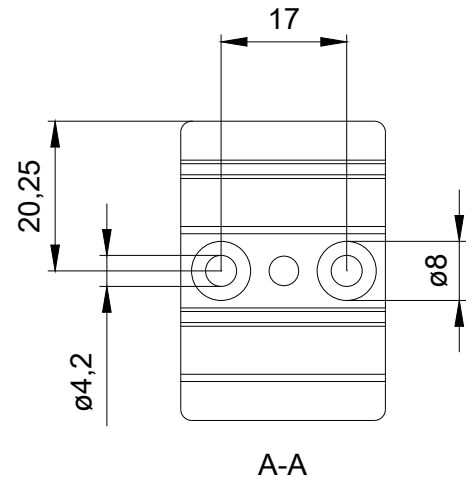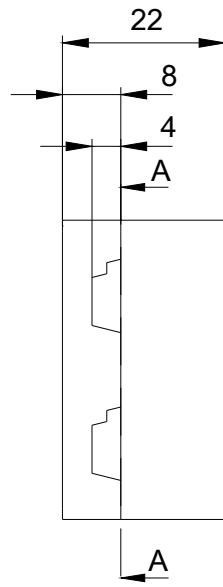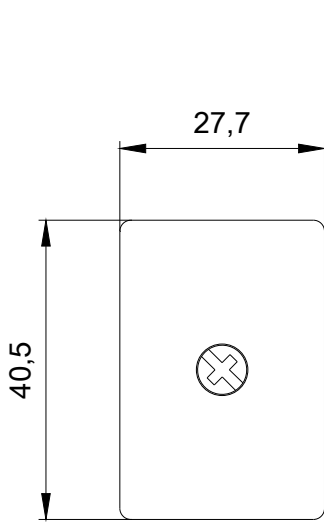

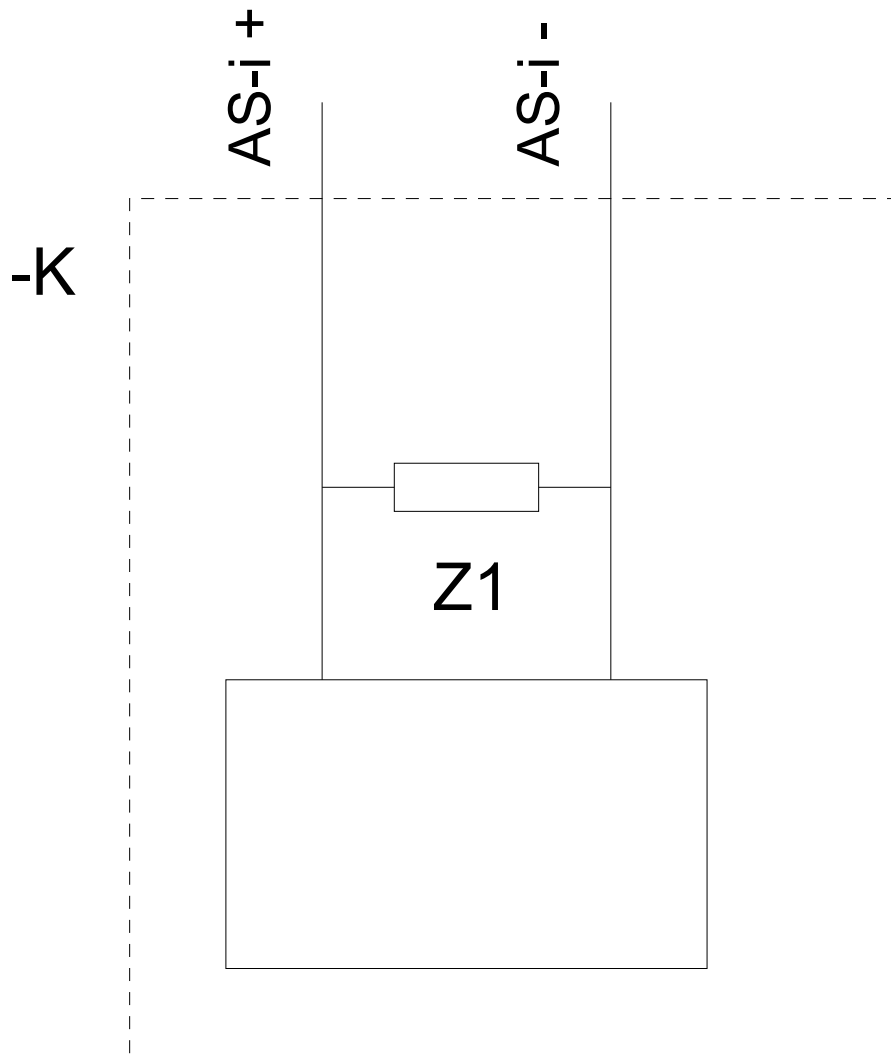

Ostatnia zmiana:

25.01.2020