

IR motion detector comfort 1.1 m

Order no.: 8534 12 ..

IR motion detector comfort 2.2 m

Order no.: 8534 22 ..

(EN)

Berker GmbH & Co. KG
Zum Gunterstal
66440 Blieskastel, Germany
Tel.: + 49 6842 945 0
Fax: + 49 6842 945 4625
e-mail: info@berker.de

www.berker.com

Setting the load on a universal switch or dimmer insert from Version R1.2

Briefly press the button	Setting mode	Duration and confirmation of the load setting	Information for use
1 x	Load factory setting	Settings duration: approx. 30 sec. The light to confirm the load flashes at 50% brightness. Load switching/dimming phases may occur during the automatic settings process. The load flashes one last time as a confirmation and then goes out. The device returns to normal operation.	Factory setting with automatic load recognition. If the switching behaviour is unsatisfactory after that, restart selection mode and select the best option.
2 x	LED mode 1 (phase cut-on)	After approx. 5 sec., the load flashes twice as a confirmation and then goes out. The device returns to normal operation.	Recommended for lower 230 V LED loads up to max. 60 W if the switching/dimming behaviour is unsatisfactory after automatic load setting.
3 x	LED mode 2 (phase cut-on)	Settings duration: ≤ 50 sec. Load switching/dimming phases may occur during the automatic settings process. Finally, the load flashes three times as a confirmation and then goes out. The device returns to normal operation.	Recommended for higher 230 V LED loads from 50 W, which can be operated in the phase cut-on. Observe manufacturer's data!
4 x	Fine setting of minimum brightness	5 predefined minimum brightness levels for 2.5 sec. each, run through repeatedly (3 runs). As soon as the connected load shows a satisfactory minimum brightness, confirm by quickly pressing the bottom button. After approx. 5 sec., the load flashes four times as a confirmation and remains switched on (50% brightness). The device returns to normal operation.	To optimise the switch-on behaviour, or if the load flickers in the lower dimming range, the minimum brightness setting can be manually adjusted here.

Table 3a

Setting the load on a universal switch or dimmer insert up to Version R1.1

Briefly press the button	Setting mode	Confirmation of the load setting	Information for use
1 x	Load fine-setting	Load blinks 1 x after approx. 30 s and changes to normal operation	Not suitable for ohmic loads (e.g. incandescent, HV halogen lamps); use factory load setting. If the load fine-setting does not bring any improvement for energy-saving lamps or 230 V LED lamps, select the energy-saving lamp fine-setting or 230 V LED lamp universal setting.
2 x	Factory load setting	Load blinks 2 x after approx. 6 s and changes to normal operation	
3 x	Energy-saving lamp fine-setting in phase cut-on	Load blinks 3 x after approx. 30 s and changes to normal operation	Energy-saving lamps are switched on at a brightness level of at least 50% in order to ensure an ignition process.
4 x	230 V LED lamp universal setting in phase cut-on or phase cut-off	Load blinks 4 x after approx. 5 s and changes to normal operation	For connected dimmable 230 V LED lamps the dimming principle and the optimal switch-on brightness level is set automatically.
	For all setting modes	Load blinks 5 x	The selected setting mode is not supported by the insert.

Table 3b

Settings

Setting response brightness via Teach-In function

The response brightness is the brightness value saved in the motion detector; when this value is undershot the motion detector switches the connected load if movements are detected. Via Teach-In function the current ambient brightness is saved as the response brightness.

Teach-In cannot be carried out on the extension unit.

The load is switched off.

Keep the button pressed for more than 10 seconds, until the status LED is flashing orange (Fig. 3).

The motion detector detects the current ambient brightness and saves it as response brightness.

Setting of the response brightness via Teach-In function and via the brightness potentiometer has the same priority. Teach-In overwrites the response brightness set on the brightness potentiometer. If the setting is made again via the potentiometer, the Teach-In figure will be overwritten.

Setting the load

If the switching performance is not satisfactory after commissioning when using the motion detector on universal switch inserts and universal touch dimmers, a load setting must be carried out.

A load setting is required each time the load is changed.

Switch off load.

Keep the button pressed for more than 25 seconds, until the status LED is slowly flashing orange.

Release push-button.

The connected load blinks once. The device is in selection mode.

If no further actions are performed within the next 10 seconds, the dimmer switches to normal operation.

Briefly press the bottom button repeatedly to activate the desired setting mode.
► See Table 3a / 3b

Information for electricians:
For the version labelling of the flush-mounted insert, see packaging label or sticker on the back of the housing.

Activating/deactivating presence simulation

During operation, the motion detector counts the motion detections in one full hour and saves the result. With active presence simulation at the beginning of the hour with the most detections saved, the light will be switched on for the duration of the delay time, even no motion is detected.

During the presence simulation, presence detection and extension unit commands will continue to be executed normally.

The presence simulation cannot be activated via the extension unit

Keep the button pressed for more than 20 seconds, until the status LED is slowly flashing red (figure 3).

The presence simulation is active. During this time the status LED lights orange. The motion detector switches the lighting on at the saved time.

Briefly press the button.

The presence simulation will be disabled, the motion detector returns to **Automode**.

Switching on the lighting via push-button extension unit or changing the switch-on brightness level (Table 2)

Optionally the lighting can be switched on via a mechanical push-button extension unit.

For extension unit operation, the lighting is switched on independently of the set brightness threshold.

When using the dimmer inserts, the last set brightness level will be saved as the switch-on brightness-level.

Activating/interrupting party function

The party function switches the lighting on for 2 hours. During this time no extension unit commands are executed.

In the case of motion detectors on extensions, activating the party function causes cyclical transmission of the switch-on pulse every 10 s. However, the light is only switched on when the brightness threshold is undershot at the main unit.

Keep the button pressed for more than 5 seconds, until the status LED is flashing red (Fig. 3).

The lighting is switched on for 2 hours. During this time the status LED is flashing red. Upon elapse of 2 hours, the motion detector switches to **Autooperation** mode.

Briefly press the button.

The party function will be cancelled, the motion detector returns to **Auto** operation mode.

Function	Party function	Teach-In	Keylock	Presence simulation	Load setting mode ¹⁾
	red	orange	green	red	orange
Hold time operation button	> 5 s	> 10 s	> 15 s	> 20 s	> 25 s

¹⁾ Only on universal switch insert and universal dimmer insert

Fig. 3: Selection of special functions and LED display

LED display	Operating mode	On switch or dimmer insert	On extension unit insert
--	Auto	Motion-dependent and brightness-dependent switch on/switch off of the load	Motion-independent switching pulse for the main unit
green	Permanent ON	Load is permanently switched-on/switched-off.	Cyclical transmission of the switch-on pulse every 10 s
red	Permanent OFF	Extension unit signals will not be evaluated	--

Table 1: Display of operating modes

Dimming status	Operation button	Performance of the insert
Motion detector applied on switch insert		
OFF	Short press	Load is switched on for the set delay time
ON	Short press	Extension of switch-on time by the set delay time
Motion detector applied on push-button dimmer comfort 1gang		
OFF	Short press	Load is switched on to the switch-on brightness-level for the set delay time
ON	Short press	Extension of switch-on time by the set delay time at the same brightness
OFF	Long press	Load is switched on to switch-on brightness-level, subsequent dimming in the opposite direction of the last dimming process. Thereafter the load remains switched on for the delay time
ON	Long press	Changes the current brightness. Dimming takes place in the opposite direction of the last dimming operation until maximum or minimum brightness. Subsequently the load remains switched on at the set brightness for the set delay time.

Table 2: Operation via push-button extension unit

Operation

Operating concept




Fig. 2: Operation and display elements

- (7) Button
- (8) Status LED

Operation is executed by pushing the button (7) on the motion detector:

- A short press of the button switches the operating modes. The operating mode is displayed via the status LED behind the optics cover of the motion detector.
- Keeping the button pressed activates special functions. Selection of the special functions is supported by the LED display (Fig. 3).

Selecting the operating mode

Briefly press the button repeatedly until the desired operating mode is selected.

The status LED indicates the selected operating mode (see Table 1).

Switching the operating mode finishes the party function or presence simulation, if these functions were previously active.

Disabling/enabling operating mode selection via button

Keep the button pressed for more than 15 seconds, until the status LED is flashing green (Fig. 3).

Selection of the operating mode via the button is disabled.

or if the button is locked:

Keep the button pressed for more than 15 seconds, until the status LED is flashing green (Fig. 3).

The operating mode can be selected via the button again.

IR motion detector comfort 1.1 m / 2.2 m

Safety instructions

Electrical equipment must only be installed and assembled by a qualified electrician in accordance with the relevant installation standards, regulations, directives and safety and accident prevention directives of the country.

Failure to comply with these installation instructions may result in damage to the device, fire or other hazards.

Due to its detection behaviour the device is not suitable for use in burglary detection or alarm systems.

These instructions are an integral component of the product and must be retained by the end user.

Design and layout of the device

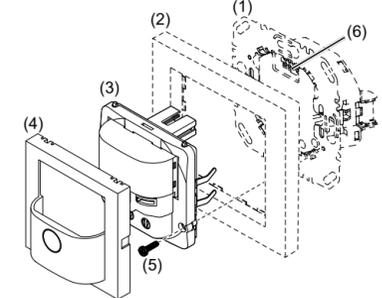


Fig. 1: Design and layout of the device

- (1) Insert (see "Accessories", not in scope of delivery)
- (2) Frame (not included)
- (3) cover
- (4) Motion detector design cover
- (5) Module retaining screw (not for Berker R.1/R.3/R.8)
- (6) Interface between insert/application module

Function

Correct use

- Automatic switching of lighting depending on heat motion and ambient brightness
- Application module for switch insert, dimmer insert or motion detector extension unit
- Only suitable for use in indoor areas with no drip and no spray water.

Product characteristics

- Integrated button for selecting operating modes and special functions
- Lockable integrated button
- Operating mode - automatic mode, permanent ON, permanent OFF can be selected
- Display operating mode via LED
- Potentiometer for setting the response brightness, delay time and detection sensitivity
- Delay time adjustable
- Pulse encoder mode for current pulse/stairwell circuits
- Adjustable detection angle for adapting the detection area
- Additional adjustment of the response brightness via Teach-In function
- Party function
- Presence simulation
- Operation on motion detector extension units

Optional extension unit operation via installation button

Commissioning optionally via IR remote control for comfort motion detector (see accessories)

Automatic mode

The motion detector detects heat motion caused by people, animals, or objects.

On switch insert:

- The light will be switched on for the delay time, if movements are detected in the detection area and the set brightness threshold is undershot. Each detected movement restarts the delay time.
- The light will be switched off if no additional movements are detected in the detection area and the set delay time has elapsed.

On dimmer insert:

- The light will be switched on to the switch-on brightness level for the delay time if movements are detected in the detection area and the set brightness threshold is undershot. Each detected movement restarts the delay time.
- After the delay time elapses the lighting will be dimmed to 50% of the switch-on brightness-level and will remain at this brightness level for 30 s (switch-off pre-warning). Any motion detected during the switch-off pre-warning restarts the delay time and restores the switch-on brightness level.
- The light will be switched off if no motion is detected any longer in the detection area and the set delay time and the switch-off time have elapsed.

On extension unit

- If motion is detected in the detection area of the extension unit, the extension unit insert sends a pulse to the main unit and then locks for 10 seconds. Recording takes place independently of the brightness on the extension unit. If motion is still detected after 10 seconds, a pulse is sent again.
- Upon receiving an extension unit pulse, the main unit switches the light on for the delay time, if the set brightness threshold is undershot. Every further extension unit pulse restarts the delay time of the main unit.

Performance after mains breakdown/return of mains supply

- Mains breakdown shorter than 0.2 s: The function is not impaired.
- Mains breakdown longer than 0.2 s: There is no function during the mains breakdown. The current configuration is saved in non-volatile memory.
- Return of mains supply: The application module executes an initialisation for approx. 15 s, during which the lighting will be switched on. Motion detection starts thereafter. If no motion is detected during the first 5 s, the lighting is switched off. The saved configuration is loaded from memory. During this period local operation via the button or extension unit can be used.

Information for electricians

Installation and electrical connection

Selecting installation location

Observe the motion orientation: a distinction is made between "direct approach" and "transverse motion". Motions transverse to the motion detector can be detected better than motions toward the motion detector (Fig. 4, 6, 7).

Select an installation location that is free of vibration. Vibrations can cause undesired switching.

Avoid sources of interference in the detection area (Fig. 6 and 7). Sources of interference, e.g. heating elements, ventilation systems, air conditioners and lamps that are cooling down can cause undesired switching (Fig. 4).

To avoid disturbing influences, the detection angle can be restricted (see Restriction of the detection area).

Assembly of the device (Figure 1)

Information on electrical connection are to be taken from the operating instructions of the insert.

Attach the cover bottom part (3) together with frame (2) to a suitable insert (1) and establish a connection between insert and the application module via the interface (6).

As soon as voltage is supplied to the application module, the status LED indicates the compatibility with the insert used.

Status LED display	Meaning
LED blinks green (approx. 5 s until motion detection is active)	Compatible
LED blinks red for 5 s	Not compatible

If available, fix dismantling protection with screw (5).

After commissioning, click the design cover (4) into place on the application module (3).

If commissioning is to take place using a handheld transmitter, set the response brightness potentiometer (Fig. 5, 14) to the T position and then snap on the design cover.

Commissioning

Overview of operation and adjustment elements

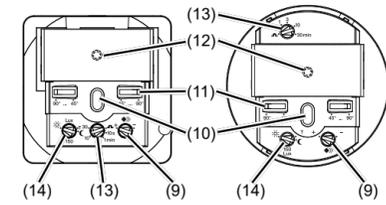


Fig. 5: Operating and adjustment elements of the bottom part of the application module

- (9) Potentiometer for sensitivity
- (10) Button
- (11) Detection angle adjuster
- (12) Status LED
- (13) Potentiometer for delay time
- (14) Potentiometer for response brightness

Setting the detection area

The detection angle can be restricted for the right side and for the left side via each adjuster (Fig. 5, 11) between 45° and 90° for each adjuster. This can be carried out on the device. The detection angle can therefore be between 90° and 180° (Fig. 8).

Use the adjusters to set the detection angle for each side.

Setting the detection performance

Test mode must be used to test the detection performance. In test mode, the motion detector works independent of brightness. Each detection switches the lighting and the status LED on for 3 seconds. The motion detection will then be deactivated for 2 seconds.

The motion detector is connected and ready for operation.

Setting the test mode. To do this, set the response brightness potentiometer (Fig. 5, 14) to the T position.

Leave the detection area and observe the switching behaviour.

If the motion detector switches on without motion in the detection field, then sources of interference (see Installation location) are present or the sensitivity is set too high.

Reduce the sensitivity if necessary and blank out sources of interference by adjusting the detection angle or removing them.

Check the detection area using a detection test and adjust if necessary.

If the detection area is too small, it can be extended via motion detector extension units (see accessories).

Setting the response brightness

The response brightness is the brightness value saved in the motion detector; when this value is undershot the motion detector switches the connected load if movements are detected. The response brightness can be set between approx. 5 (C) through 150 Lux (factory setting) to daytime operation (S). The S symbol stands for independent of brightness switching. The response brightness can be variably adjusted in the intermediate areas.

In order to control the lighting in stairwells in accordance with DIN EN 12464-1, 2003-3, select the 150 Lux potentiometer setting.

Turn the response brightness potentiometer (Fig. 5, 14) to the desired position.

To save the current ambient brightness as response brightness, use the Teach-In function (see Setting the response brightness via Teach-In function).

As the brightness evaluation only takes place via the main unit, there is no need to set the response brightness on extension units.

Setting the delay time

The delay time is the period of time saved in the motion detector which is the shortest time that the lighting is switched on for when the response brightness is undershot and motion is detected.

The delay time can be set to pulse encoder mode or to the defined values 10 s, 1 min., 3 min. (factory setting), 10 min. and 30 min. The setting is infinitely variable between the intermediate areas. On delivery, the delay time is set to 3 minutes.

Note that lights can be worn down due to frequent switching with very short delay times.

Turn potentiometer for switch-on time (Fig. 5, 13) to the desired position.

Setting the pulse encoder mode

Pulse encoder mode is suitable for controlling stair light/current pulse circuits. In pulse encoder mode, the 200 ms switching output is switched on when the response brightness is undershot and movement is detected. Motion detection is then locked for 10 s.

Turn the delay time potentiometer (Figure 5, 13) to the position.

Setting the sensitivity

Detection is factory-set to maximum sensitivity. If there are frequent incorrect detections, the sensitivity can be reduced.

Turn the sensitivity potentiometer (Fig. 5, 9) to the desired position.

Commissioning and operation with IR remote control (optional)

The motion detector can also be commissioned and configured using the IR remote control from Hager (order no. EE806). For this, the device has an infrared receiver diode.

During operation, point the front of the remote control towards the infrared receiver diode (Fig. 9).

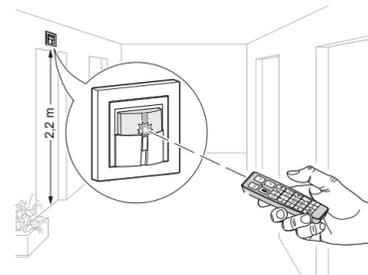


Fig. 9: Using the IR remote control

Activating/deactivating the motion detector for activation via IR remote control

Set the response brightness potentiometer (Fig. 5, 14) to the T position.

From now on, operation and settings must be made using the IR remote control. Potentiometer settings made on the device will no longer be evaluated.

Set a response brightness which deviates from Ton the potentiometer to deactivate control via the remote control.

Selecting the settings

On the motion detector, the potentiometer for response brightness is in the T position.

Briefly press the IR remote control button.

The selected action/setting is executed (see Table 4).

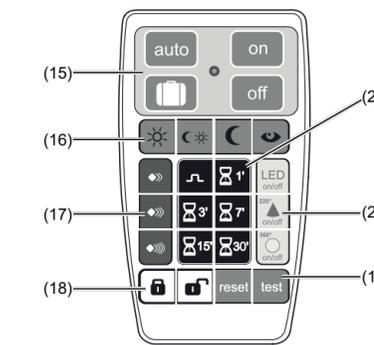


Fig. 10: Button assignment on the IR remote control

Locking/unlocking the IR remote control

If the remote control is locked, no IR signals are transmitted when the buttons are pressed. The exceptions to this are the operation buttons (Fig. 10, 15) and the locking buttons (18). These are always active.

Press the lock and unlock buttons simultaneously for 1 s.

The setting buttons on the remote control are deactivated.

Press the lock and unlock buttons simultaneously again for 1 s to unlock.

Locking/unlocking the setting function for motion detector

If the setting function is locked, then the lock relates to a motion detector. This does not accept any IR setting signals during the lock. When the buttons on the remote control are pressed, then infrared signals will continue to be sent, e.g. to control other motion detectors.

Briefly press the lock button on the IR remote control.

The controlled motion detector does not accept any further setting commands.

Briefly press the lock button on the IR remote control.

The setting function is unlocked. The motion detector accepts setting commands.

Area (Figure 10)	Function of the group	Button	Action/setting
(15)	Operation of the controlled load via the motion detector Always running, even if the remote control and setting function for the motion detector are locked via the lock button.	auto	Motion- and brightness-dependent switching on/switching off of the load
		☑	Activate the presence simulation
		off	Activate permanent OFF
		on	Activate permanent ON
(16)	Setting of the response brightness	☾	approx. 5 Lux, night operation
		☀	approx. 150 Lux, stairwell operation
		☀	Independent of brightness, daytime operation
		👁	Save current brightness via Teach-In
(17)	Setting the sensitivity	👁	Minimum sensitivity
		👁	Medium sensitivity
		👁	Maximum sensitivity
(21)	Setting the delay time	📏	Pulse encoder mode
(18)	Lock/unlock (see Locking the IR remote control or Locking the setting function for motion detectors).	🔒	Lock
		🔓	Unlock
(19)	Setting special functions	reset	Press > 2 s: reset to factory setting
		test	Briefly press the button: Activate test mode
(20)	Unsupported buttons, no function.	LED on/off	--
		22P on/off	--
		30P on/off	--
		30P on/off	--

Table 4

Technical data

Connection	Mounting on suitable inserts (see Accessories)
Power supply	via insert
Response brightness	approx. 5 ... 1000 Lux (∞)
Delay time	approx. 10 s ... 30 min
Sensitivity	approx. 10 ... 100 %
Detection angle	approx. 90 ... 180°
Detection area (1.1 m)	approx. 12 x 16 m
Detection area (2.2 m)	approx. 8 x 12 m
Degree of protection	IP 20
Relative humidity	0 ... 65% (no condensation)
Ambient temperature	-5 ... +45 °C
Storage/transport temperature	-20 ... +60 °C
Mounting orientation	Interface between application and power module at top

Accessories

Relay insert	8512 12 xx
Universal switch insert 1gang	8512 11 xx
Push-button dimmer 1gang	8542 11 xx
Push-button dimmer comfort 1gang	8542 12 xx
Motion detector extension unit	8532 01 xx
IR remote control for comfort motion detector	(Hager) EE806

Warranty

We reserve the right to realise technical and formal changes to the product in the interest of technical progress.

Our products are under guarantee within the scope of the statutory provisions.

If you have a warranty claim, please contact the point of sale.

Fig. 4: Installation location of the motion detectors

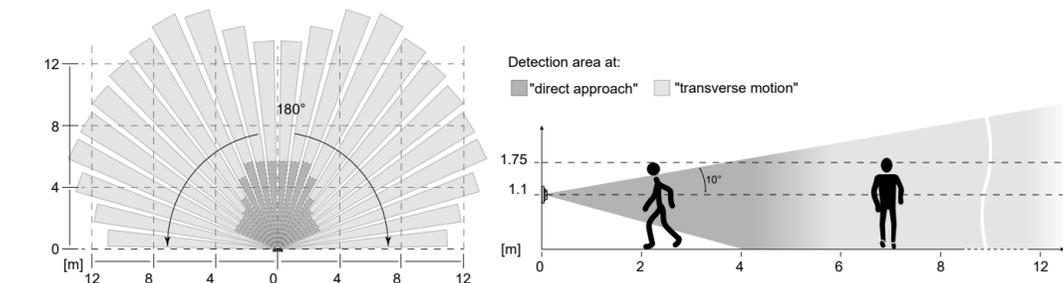


Fig. 6: Detection area of the motion detector for installation height 1.1 m

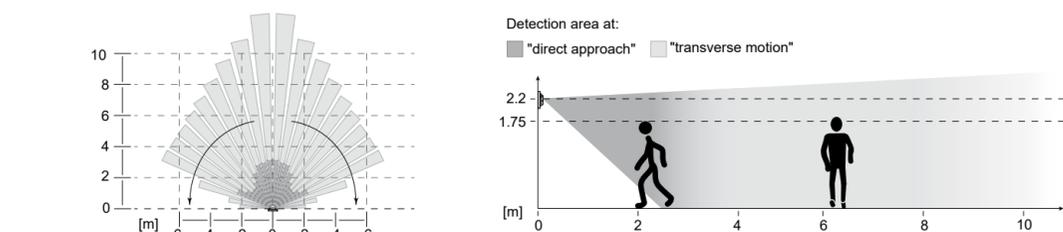


Fig. 7: Detection area of the motion detector for installation height 2.2 m

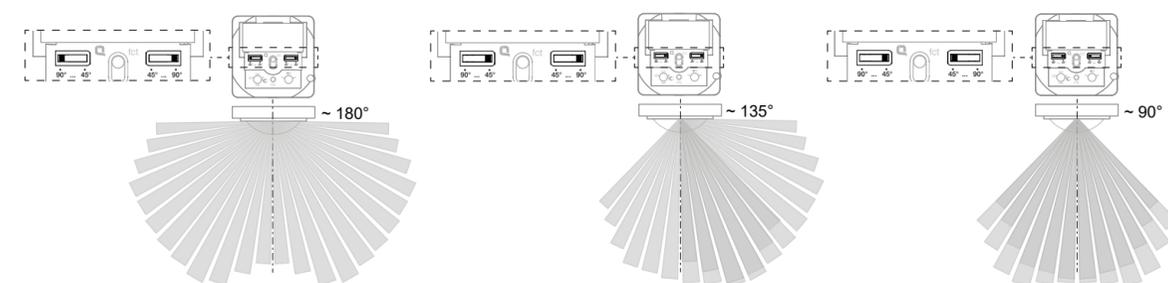


Fig. 8: Setting the detection angle