

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and female D-subminiature socket strip, for mounting on NS 35 rails, 9-pos.

### Your advantages

- ✓ 9 to 50-pos.
- ✓ Metal foot
- ✓ According to IEC 60603-13
- ✓ 1:1 connection
- ✓ Screw connection



### Key Commercial Data

|              |                                                                                      |
|--------------|--------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                 |
| GTIN         |  |
| GTIN         | 4046356312936                                                                        |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Width  | 34.7 mm |
| Height | 65.5 mm |
| Depth  | 45.1 mm |

#### Ambient conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

#### General

|                                 |         |
|---------------------------------|---------|
| Nominal voltage $U_N$           | 25 V AC |
|                                 | 60 V DC |
| Max. perm. current (per branch) | 2 A     |

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

### Technical data

#### General

|                     |     |
|---------------------|-----|
| Number of positions | 9   |
| Mounting position   | any |

#### Connection data

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection name                  | Field level                                 |
| Connection in acc. with standard | IEC / EN                                    |
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm                                        |
| Screw thread                     | M 3                                         |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 12                                   |

#### Connection data 2

|                       |                    |
|-----------------------|--------------------|
| Connection name       | Controller level   |
| Connection method     | D-SUB socket strip |
| Number of connections | 1                  |
| Number of positions   | 9                  |

#### Standards and Regulations

|                                        |              |
|----------------------------------------|--------------|
| Connection in acc. with standard       | CSA          |
| Standards/regulations                  | IEC 60664    |
|                                        | DIN EN 50178 |
| Rated surge voltage                    | 1.2 kV       |
| Pollution degree                       | 2            |
| Overvoltage category                   | II           |
| Flammability rating according to UL 94 | V0           |


#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

Interface module - VIP-2/SC/D 9SUB/F - 2315162

Circuit diagram

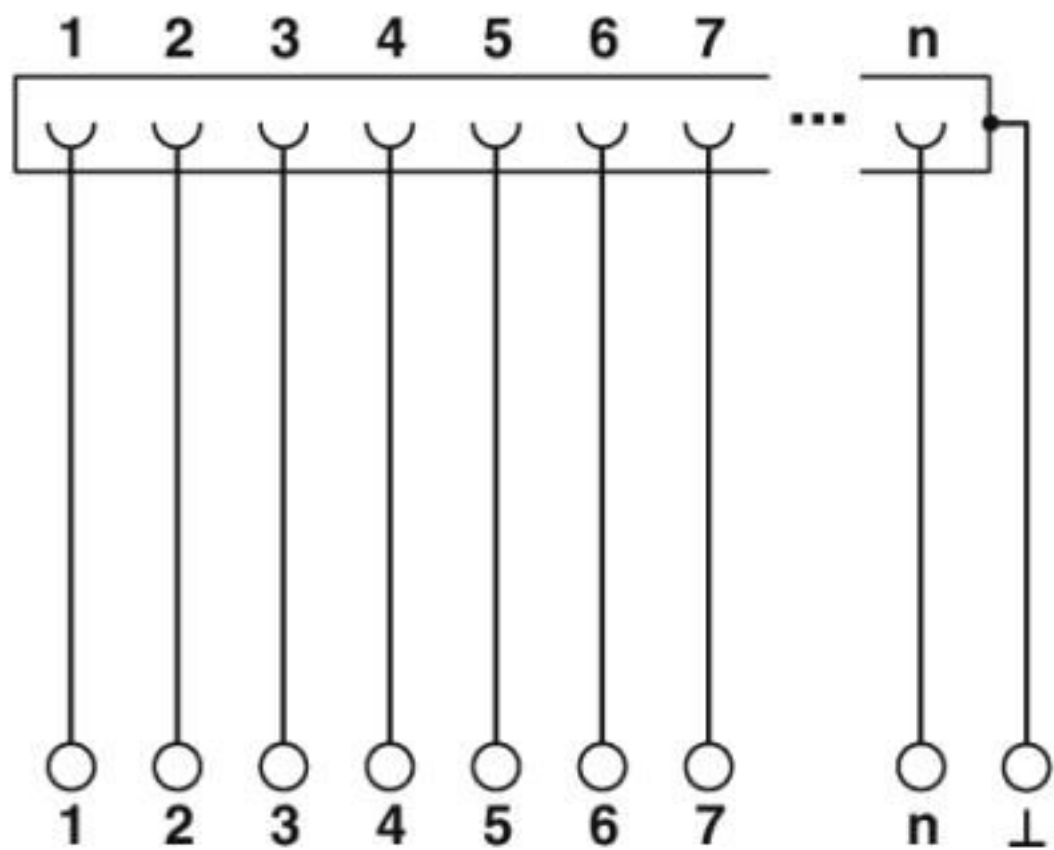

Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27141152 |
| eCl@ss 11.0   | 27141152 |
| eCl@ss 4.0    | 27250300 |
| eCl@ss 4.1    | 27250300 |
| eCl@ss 5.0    | 27250300 |
| eCl@ss 5.1    | 27250300 |
| eCl@ss 6.0    | 27242600 |
| eCl@ss 7.0    | 27141152 |
| eCl@ss 8.0    | 27141152 |
| eCl@ss 9.0    | 27141152 |

ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002780 |
| ETIM 5.0 | EC002780 |
| ETIM 6.0 | EC002780 |
| ETIM 7.0 | EC002780 |

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11     | 39121421 |
| UNSPSC 12.01  | 39121421 |
| UNSPSC 13.2   | 39121432 |
| UNSPSC 18.0   | 39121432 |
| UNSPSC 19.0   | 39121432 |
| UNSPSC 20.0   | 39121432 |
| UNSPSC 21.0   | 39121432 |

### Approvals

#### Approvals

#### Approvals

CSA / UL Recognized / cUL Recognized / CSAus / EAC / EAC / cULus Recognized / cCSAus

#### Ex Approvals

#### Approval details

|                    |                                                                                     |                                                                                                                                         |         |
|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------|
| CSA                |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 2122203 |
| Nominal voltage UN |                                                                                     | 105 V                                                                                                                                   |         |
| Nominal current IN |                                                                                     | 2 A                                                                                                                                     |         |
| mm²/AWG/kcmil      |                                                                                     | 28-14                                                                                                                                   |         |

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Recognized      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 238705 |
| Nominal voltage UN |                                                                                     | 125 V                                                                                                                                                 |               |
| Nominal current IN |                                                                                     | 2 A                                                                                                                                                   |               |
| mm²/AWG/kcmil      |                                                                                     | 30-12                                                                                                                                                 |               |

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

### Approvals

|                    |                                                                                   |                                                                                                                                                       |               |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| cUL Recognized     |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 238705 |
| Nominal voltage UN | 125 V                                                                             |                                                                                                                                                       |               |
| Nominal current IN | 2 A                                                                               |                                                                                                                                                       |               |
| mm²/AWG/kcmil      | 30-12                                                                             |                                                                                                                                                       |               |

|                    |                                                                                   |                                                                                                                                         |         |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------|
| CSAus              |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 2122203 |
| Nominal voltage UN | 105 V                                                                             |                                                                                                                                         |         |
| Nominal current IN | 2 A                                                                               |                                                                                                                                         |         |
| mm²/AWG/kcmil      | 28-14                                                                             |                                                                                                                                         |         |

|     |                                                                                     |               |  |
|-----|-------------------------------------------------------------------------------------|---------------|--|
| EAC |  | EAC-Zulassung |  |
|-----|-------------------------------------------------------------------------------------|---------------|--|

|     |                                                                                     |                          |  |
|-----|-------------------------------------------------------------------------------------|--------------------------|--|
| EAC |  | RU C-<br>DE.A*30.B.01742 |  |
|-----|-------------------------------------------------------------------------------------|--------------------------|--|

|                  |                                                                                     |  |  |
|------------------|-------------------------------------------------------------------------------------|--|--|
| cULus Recognized |  |  |  |
|------------------|-------------------------------------------------------------------------------------|--|--|

|        |                                                                                     |  |  |
|--------|-------------------------------------------------------------------------------------|--|--|
| cCSAus |  |  |  |
|--------|-------------------------------------------------------------------------------------|--|--|

### Accessories

#### Accessories

#### System cable

Cable - CABLE-D 9SUB/B/S/ 50/KONFEK/S - 2299987



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 0.5 m

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

### Accessories

---

Cable - CABLE-D 9SUB/B/S/100/KONFEK/S - 2299990



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

---

Cable - CABLE-D 9SUB/B/S/150/KONFEK/S - 2300009



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1.5 m

---

Cable - CABLE-D 9SUB/B/S/200/KONFEK/S - 2302010



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

---

Cable - CABLE-D 9SUB/B/S/300/KONFEK/S - 2302023



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

---

Cable - CABLE-D 9SUB/B/S/400/KONFEK/S - 2302036



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 4 m

---

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

### Accessories

Cable - CABLE-D 9SUB/B/S/600/KONFEK/S - 2302049



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 6 m

---

Cable - CABLE D-SUB-S/.../.../... - 2302340



Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length

---

Cable - CABLE-D 9SUB/S/S/100/KONFEK/S - 2305570



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

---

Cable - CABLE-D 9SUB/S/S/200/KONFEK/S - 2305583



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

---

Cable - CABLE-D 9SUB/S/S/300/KONFEK/S - 2305596



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

### Accessories

Cable - CABLE D-SUB-S-S-S/.../.../... - 2302434



Shielded round cable, assembled with two D-SUB male connectors, variable cable length

---

### Terminal marking

Marker for terminal blocks - UC-TM 4 - 0818111



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

---

Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

Marker for terminal blocks - UCT-TM 6 - 0828736



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

---

Zack marker strip - ZB 5,08:UNBEDRUCKT - 0809793



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

## Interface module - VIP-2/SC/D 9SUB/F - 2315162

### Accessories

Zack marker strip - ZB 22:UNBEDRUCKT - 0811862



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 22 mm, lettering field size: 10.5 x 21.8 mm, Number of individual labels: 4

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>