

# Product Environmental Profile

## Magelis HMI ST Operator Panel






## General information

<b>Representative product</b>	Magelis HMI ST Operator Panel - HMIST6400
<b>Description of the product</b>	Human machine interface with serial link and ethernet communication
<b>Description of the range</b>	Magelis HMI ST Operator Panel The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
<b>Functional unit</b>	To provide a human machine interface with serial link and ethernet communication during 15 years and a 100% use rate at 9W.



## Constituent materials

**Reference product mass** 999 g including the product, its packaging and additional elements and accessories

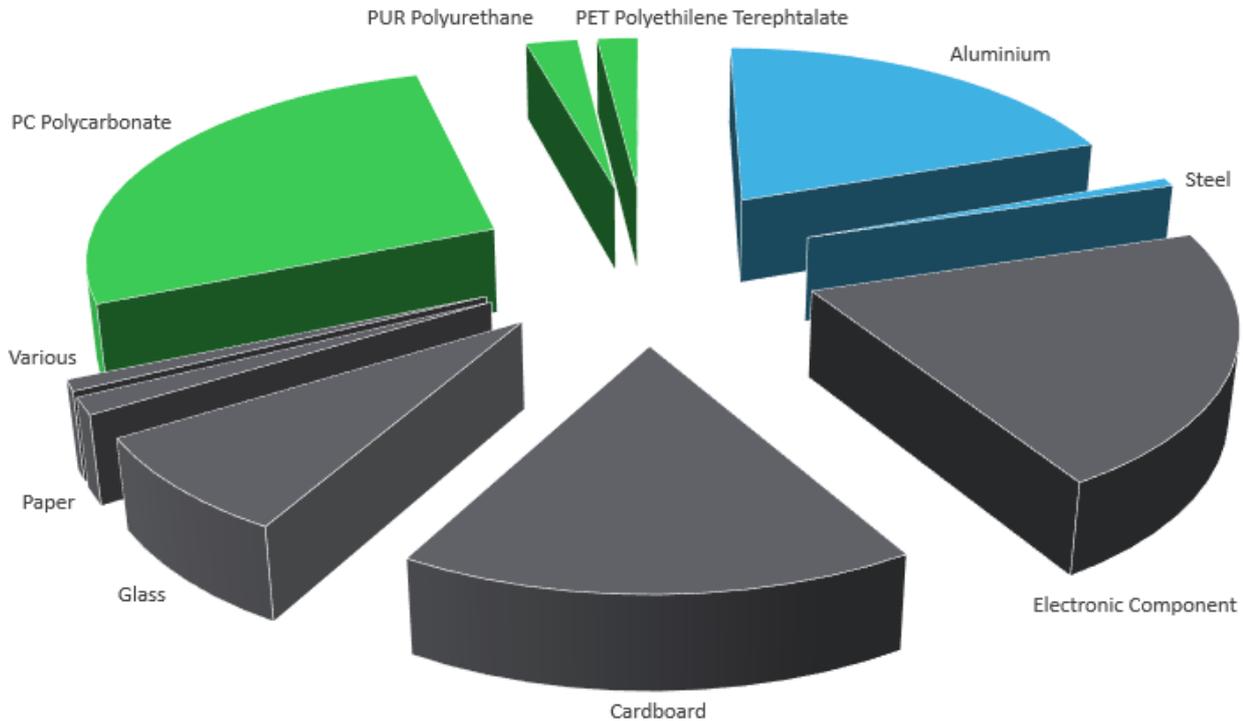

Plastics	31.5%
Metals	20.4%
Others	48.3%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Magelis HMI ST Operator Panel presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 319.3 g, consisting of cardboard (54%), expendable polystyrene (8%), other accessories (38%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require special installation operations
<b>Use</b>	The product is in active mode 100% of the time with a power use of 9W for 15 years.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains electronic card (103g), battery (2.5g), dismantled metal enclosure (105g), dismantled plastic housing (281g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>53%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts


<b>Reference life time</b>	15 years			
<b>Product category</b>	Other equipments - Active product			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	See PSR			
<b>Geographical representativeness</b>	China, Europe and US			
<b>Technological representativeness</b>	Human machine interface with serial link and ethernet communication			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN

### Compulsory indicators

### Magelis HMI ST Operator Panel - HMIST6400

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.99E-03	2.97E-03	0*	0*	1.96E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	4.37E+00	2.89E+00	5.89E-04	0*	1.48E+00	0*
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	1.09E+00	8.45E-01	1.36E-04	0*	2.43E-01	1.62E-04
Contribution to global warming	kg CO <sub>2</sub> eq	3.56E+03	2.66E+03	0*	0*	9.01E+02	3.65E-01
Contribution to ozone layer depletion	kg CFC11 eq	5.67E-05	3.71E-05	0*	0*	1.96E-05	9.03E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	4.84E-01	3.45E-01	0*	0*	1.39E-01	0*
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life

Net use of freshwater	m3	6.37E+02	5.81E+00	0*	0*	6.31E+02	0*
Total Primary Energy	MJ	5.76E+04	4.30E+04	0*	0*	1.47E+04	0*

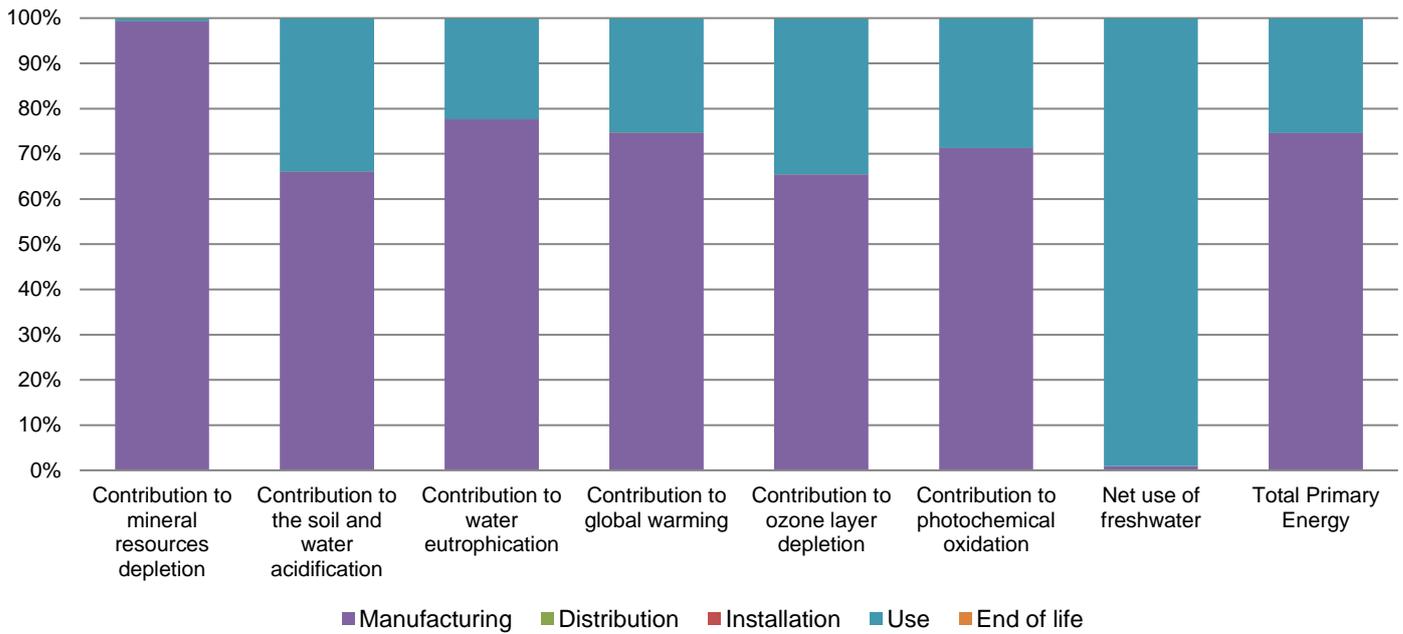

Optional indicators		Magelis HMI ST Operator Panel - HMIST6400					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.49E+04	4.15E+04	0*	0*	1.34E+04	0*
Contribution to air pollution	m <sup>3</sup>	3.52E+05	2.73E+05	0*	0*	7.83E+04	0*
Contribution to water pollution	m <sup>3</sup>	1.77E+05	1.34E+05	2.12E+01	0*	4.32E+04	2.33E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.13E-01	6.13E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.15E+03	2.11E+03	0*	0*	1.04E+03	0*
Total use of non-renewable primary energy resources	MJ	5.45E+04	4.09E+04	0*	0*	1.36E+04	0*
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.15E+03	2.11E+03	0*	0*	1.04E+03	0*
Use of renewable primary energy resources used as raw material	MJ	7.55E-01	7.55E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.45E+04	4.08E+04	0*	0*	1.36E+04	0*
Use of non renewable primary energy resources used as raw material	MJ	1.31E+01	1.31E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.84E+02	2.61E+02	0*	0*	2.22E+01	1.28E+00
Non hazardous waste disposed	kg	1.26E+03	4.84E+02	0*	0*	7.73E+02	0*
Radioactive waste disposed	kg	4.66E-01	2.61E-02	0*	0*	4.40E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	7.28E-01	7.25E-02	0*	2.76E-01	0*	3.80E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.99E-02	0*	0*	0*	0*	2.99E-02
Exported Energy	MJ	5.86E-04	5.50E-05	0*	5.30E-04	0*	0*

*\* represents less than 0.01% of the total life cycle of the reference flow*

*Life cycle assessment performed with EIME version EIME v5.7.0.4, database version 2016-11 in compliance with ISO14044.*

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

For Magelis HMI ST Operator Panels, the first proposition for significant parameter is product weight. Depending on the impact analysis, the environmental indicators mineral resources depletion of other products in this family may be proportional extrapolated by product weight; for the indicator net use of fresh water, impact may be proportional extrapolated by energy consumption values; for other indicators, impact may be 70% proportional extrapolated by product weight and 30% proportional extrapolated by energy consumption values.

*Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.*

*Independent verification of the declaration and data*

Internal

*The elements of the present PEP cannot be compared with elements from another program.*

*Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »*

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP1810005EN\_V1

Published by Schneider Electric

© 2018 - Schneider Electric – All rights reserved

11/2018