
Product Environmental Profile

Thalassa Accessories - Plinths Polyester





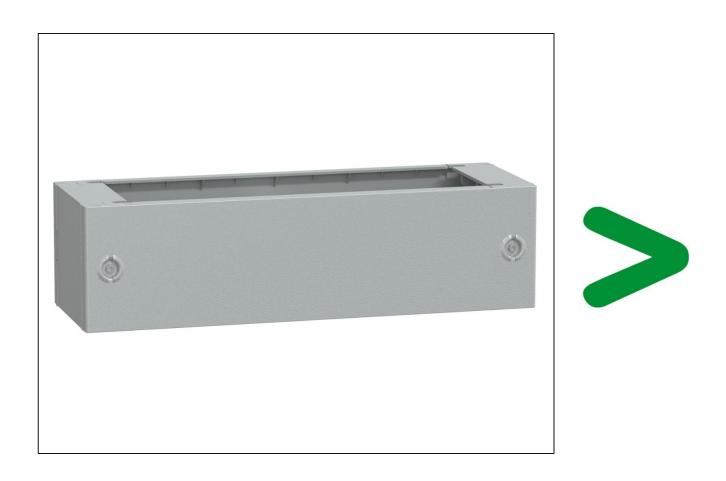


General information

| Representative product | Thalassa Accessories - Plinths Polyester - NSYZA273G |
|----------------------------|---|
| Description of the product | The main purpose of the Thalassa Polyester Accessories is to complete the main product. Thalassa polyester enclosures with more functionalities and alternative usages. This range consists of external accessories for installation and locking and internal accessories for mounting equipment and cable management. This PEP concerns plinths made of polyester reinforced with fiberglass designed to be installed on the floor on concrete base or into the ground to support and raise the main enclosure. |
| Functional unit | To Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure having the following dimensions H200mm x W744mm x D250mm, while protecting against mechanical impacts (IK10-IEC 62262) and the penetration of solid objects and liquids (IP44-IEC 60529). |

Constituent materials

Reference product mass

6120.17 g including the product, its packaging and additional elements and accessories

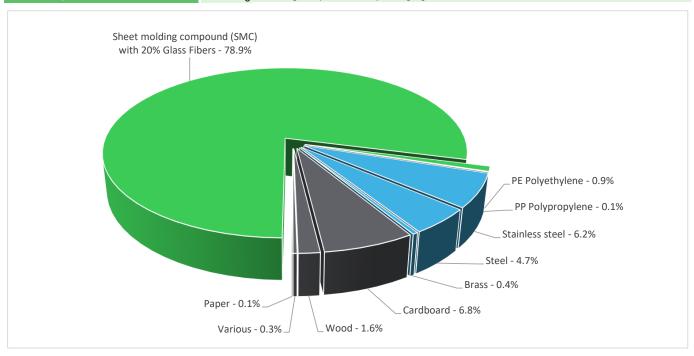

Plastics 79.9%

Metals 11.3%

Others 8.8%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page




| The Thalassa Accessories - Plinths Polyester presents the following relevent environmental aspects | | | | | |
|--|---|--|--|--|--|
| Manufacturing | Manufactured at a Schneider Electric production site ISO14001 certified | | | | |
| | Weight and volume of the packaging optimized, based on the European Union's packaging directive | | | | |
| Distribution | Packaging weight is 582.7 g, consisting of Cardboard (72.06%), Paper (1%), PE-LD (9.38%), PP Polypropylene (0.4%), Wood (17.16%) | | | | |
| | Product distribution optimised by setting up local distribution centres | | | | |
| Installation | The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal). | | | | |
| Use | The product does not require special maintenance operations. | | | | |
| | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials | | | | |
| End of life | No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. | | | | |
| | Recyclability potential: Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). | | | | |

P Environmental impacts

| Reference life time | 20 years | | | | |
|-------------------------------------|---|----------------|----------------|----------------|--|
| Product category | Unequipped enclosures and cabinets | | | | |
| Installation elements | No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation. | | | | |
| Use scenario | Non applicable for unequipped enclosures and cabinets | | | | |
| Geographical representativeness | Europe | | | | |
| Technological representativeness | The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production. | | | | |
| | Manufacturing | Installation | Use | End of life | |
| Energy model used | Energy model used: Spain | Not Applicable | Not Applicable | Not Applicable | |

| Thalassa Accessories - Plinths Polyester - NSYZA273G | | | | | | |
|--|---|---|---|--|---|--|
| Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| kg Sb eq | 1.92E-04 | 1.92E-04 | 3.16E-08 | 0* | 0* | 0* |
| kg SO ₂ eq | 4.14E-02 | 3.58E-02 | 3.61E-03 | 1.73E-04 | 0* | 1.78E-03 |
| kg PO ₄ 3- eq | 9.25E-03 | 7.78E-03 | 8.30E-04 | 7.19E-05 | 0* | 5.71E-04 |
| kg CO ₂ eq | 2.40E+01 | 2.18E+01 | 7.90E-01 | 1.35E-01 | 0* | 1.28E+00 |
| kg CFC11 eq | 2.00E-06 | 1.95E-06 | 1.60E-09 | 3.97E-10 | 0* | 4.29E-08 |
| kg C₂H₄ eq | 6.38E-03 | 5.91E-03 | 2.57E-04 | 3.34E-05 | 0* | 1.80E-04 |
| Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| m3 | 3.96E-01 | 3.95E-01 | 7.07E-05 | 0* | 0* | 9.10E-04 |
| MJ | 3.40E+02 | 3.20E+02 | 1.12E+01 | 4.79E-01 | 0* | 8.37E+00 |
| | Unit kg Sb eq kg SO ₂ eq kg PO ₄ ³⁻ eq kg CO ₂ eq kg CFC11 eq kg C ₂ H ₄ eq Unit m3 | Unit Total kg Sb eq 1.92E-04 kg SO ₂ eq 4.14E-02 kg PO ₄ ³⁻ eq 9.25E-03 kg CO ₂ eq 2.40E+01 kg CFC11 2.00E-06 kg C ₂ H ₄ eq 6.38E-03 Unit Total m3 3.96E-01 | Unit Total Manufacturing kg Sb eq 1.92E-04 1.92E-04 kg SO ₂ eq 4.14E-02 3.58E-02 kg PO ₄ ³⁻ eq 9.25E-03 7.78E-03 kg CO ₂ eq 2.40E+01 2.18E+01 kg CFC11 eq 2.00E-06 1.95E-06 kg C ₂ H ₄ eq 6.38E-03 5.91E-03 Unit Total Manufacturing m3 3.96E-01 3.95E-01 | Unit Total Manufacturing Distribution kg Sb eq 1.92E-04 1.92E-04 3.16E-08 kg SO ₂ eq 4.14E-02 3.58E-02 3.61E-03 kg PO ₄ ³⁻ eq 9.25E-03 7.78E-03 8.30E-04 kg CO ₂ eq 2.40E+01 2.18E+01 7.90E-01 kg CFC11 eq 2.00E-06 1.95E-06 1.60E-09 kg C ₂ H ₄ eq 6.38E-03 5.91E-03 2.57E-04 Unit Total Manufacturing Distribution m3 3.96E-01 3.95E-01 7.07E-05 | Unit Total Manufacturing Distribution Installation kg Sb eq 1.92E-04 1.92E-04 3.16E-08 0* kg SO ₂ eq 4.14E-02 3.58E-02 3.61E-03 1.73E-04 kg PO ₄ ^{3*} eq 9.25E-03 7.78E-03 8.30E-04 7.19E-05 kg CO ₂ eq 2.40E+01 2.18E+01 7.90E-01 1.35E-01 kg CFC11 eq 2.00E-06 1.95E-06 1.60E-09 3.97E-10 kg C ₂ H ₄ eq 6.38E-03 5.91E-03 2.57E-04 3.34E-05 Unit Total Manufacturing Distribution Installation m3 3.96E-01 3.95E-01 7.07E-05 0* | Unit Total Manufacturing Distribution Installation Use kg Sb eq 1.92E-04 1.92E-04 3.16E-08 0* 0* kg SO ₂ eq 4.14E-02 3.58E-02 3.61E-03 1.73E-04 0* kg PO ₄ ³⁻ eq 9.25E-03 7.78E-03 8.30E-04 7.19E-05 0* kg CO ₂ eq 2.40E+01 2.18E+01 7.90E-01 1.35E-01 0* kg CFC11 eq 2.00E-06 1.95E-06 1.60E-09 3.97E-10 0* kg C ₂ H ₄ eq 6.38E-03 5.91E-03 2.57E-04 3.34E-05 0* Unit Total Manufacturing Distribution Installation Use m3 3.96E-01 3.95E-01 7.07E-05 0* 0* |

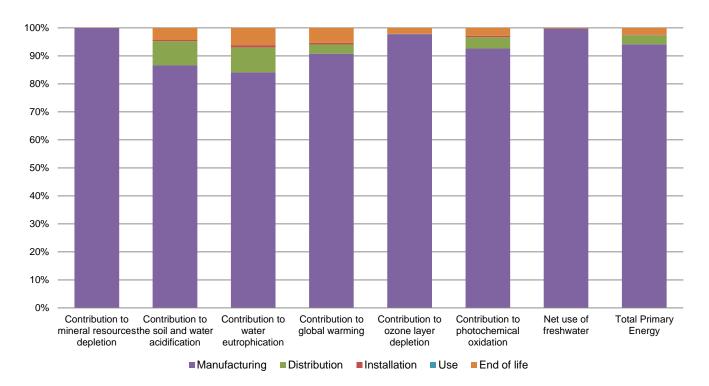

| Optional indicators | | Thalassa Ac | cessories - Plinth | s Polyester - | NSYZA273G | | |
|---|------|-------------|--------------------|---------------|--------------|-----|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to fossil resources depletion | MJ | 2.14E+02 | 1.96E+02 | 1.11E+01 | 4.61E-01 | 0* | 6.73E+00 |
| Contribution to air pollution | m³ | 3.25E+03 | 3.15E+03 | 3.36E+01 | 4.03E+00 | 0* | 6.20E+01 |
| Contribution to water pollution | m³ | 1.40E+03 | 1.19E+03 | 1.30E+02 | 5.31E+00 | 0* | 8.27E+01 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Use of secondary material | kg | 3.45E-01 | 3.45E-01 | 0* | 0* | 0* | 0* |
| Total use of renewable primary energy resources | MJ | 6.57E+00 | 6.55E+00 | 1.49E-02 | 4.19E-03 | 0* | 9.19E-03 |
| Total use of non-renewable primary energy resources | MJ | 3.33E+02 | 3.13E+02 | 1.12E+01 | 4.75E-01 | 0* | 8.36E+00 |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | -3.96E+00 | -3.99E+00 | 0* | 0* | 0* | 0* |
| Use of renewable primary energy resources used as raw material | MJ | 1.05E+01 | 1.05E+01 | 0* | 0* | 0* | 0* |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 2.64E+02 | 2.44E+02 | 1.12E+01 | 4.75E-01 | 0* | 8.36E+00 |
| Use of non renewable primary energy resources used as raw material | MJ | 6.90E+01 | 6.90E+01 | 0* | 0* | 0* | 0* |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Hazardous waste disposed | kg | 2.61E+01 | 1.55E+01 | 0* | 0* | 0* | 1.06E+01 |
| Non hazardous waste disposed | kg | 1.60E+01 | 1.59E+01 | 2.81E-02 | 1.28E-01 | 0* | 2.55E-02 |
| Radioactive waste disposed | kg | 2.48E-03 | 2.42E-03 | 2.00E-05 | 4.96E-06 | 0* | 4.13E-05 |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Materials for recycling | kg | 1.74E+00 | 6.04E-01 | 0* | 4.69E-01 | 0* | 6.68E-01 |
| Components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Materials for energy recovery | kg | 2.46E-01 | 0* | 0* | 0* | 0* | 2.46E-01 |
| Exported Energy | MJ | 7.00E-02 | 6.58E-03 | 0* | 6.34E-02 | 0* | 0* |

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2020-12 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| Registration number | ENVPEP110921EN_V1 | Drafting rules | PCR-ed3-EN-2015 04 02 |
|---------------------|-------------------|-------------------------------------|----------------------------|
| Date of issue | 06/2022 | Supplemented by | PSR-0005-ed2-EN-2016 03 29 |
| Validity period | 5 years | Information and reference documents | www.pep-ecopassport.org |

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP110921EN_V1

© 2019 - Schneider Electric - All rights reserved

06/2022