


Product Environmental Profile

LED Lamp for Enclosures



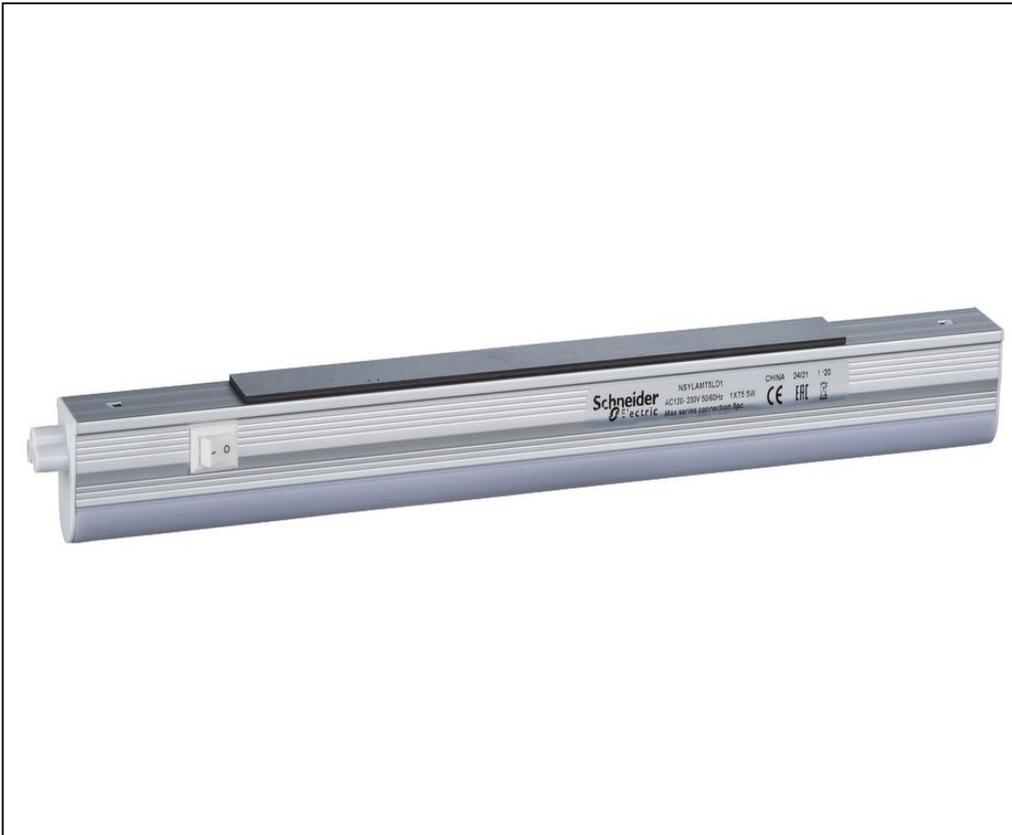

General information


Representative product	LED Lamp for Enclosures - NSYLAMT5LD1
Description of the product	The main purpose of the LED lamp is designed to optimise the cost benefit relation and can be used in almost all enclosures respecting the dimensions. These LED Lamps and door accessories designed to fit the needs of your electrical control panels. This lamp is designed to be used inside enclosures, allowing maintenance people to see inside the enclosure during maintenance operations. It is designed to be used only a couple of hours per month/year
Functional unit	The main function of the product is to Provide lighting that delivers an outgoing artificial luminous flux of 1000* lumens during a reference lifetime of 35000* hours while protecting against penetration of solid objects and liquids (IP20 - IEC 60529) as per standard IEC 60598.

*Actual product having 500 lumens of luminous flux & 25000 hours of service life respectively. To ensure Comparability, We followed PSR Functional unit.



Constituent materials

Reference product mass 575 g including the product, its packaging and additional elements and accessories

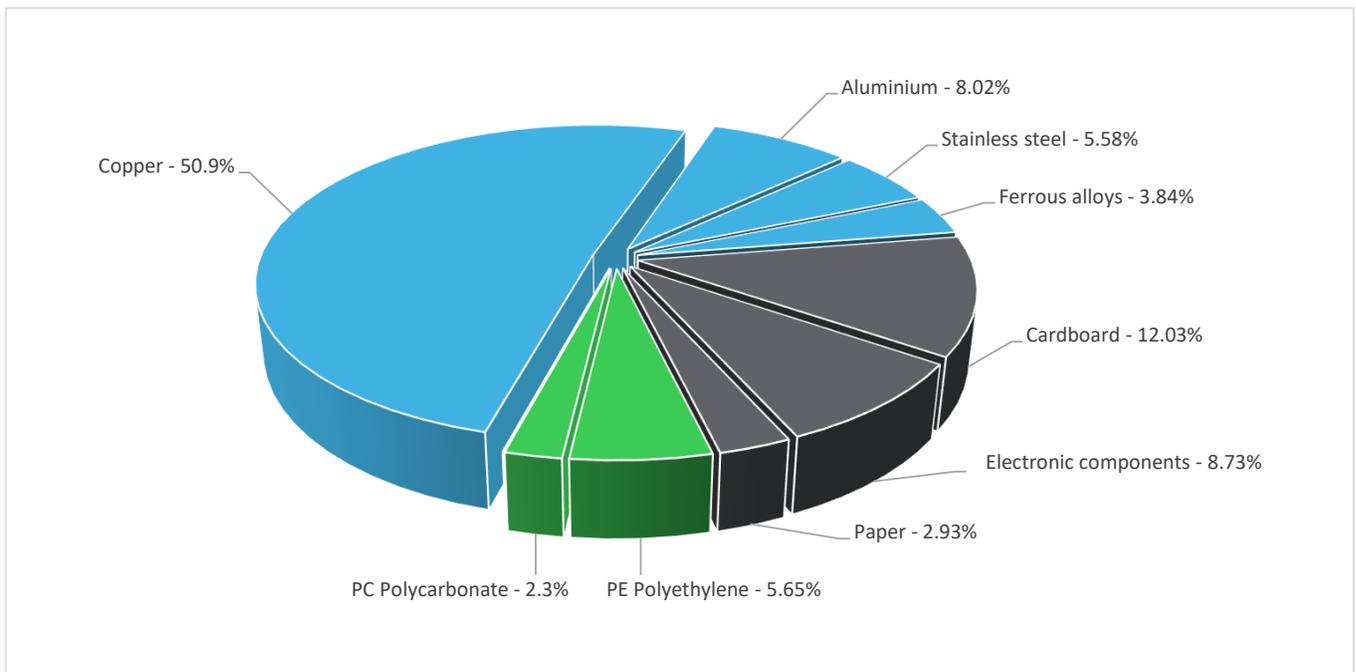

Plastics	8.0%
Metals	68.3%
Others	23.7%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The LED Lamp for Enclosures presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 118.2 g, consisting of Cardboard (58.38%), Paper (14.21%) and PE-LD (27.41%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains PCBA Board (41.134 g), Cable-high current (291.96 g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 40% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts

Reference life time	20 years			
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal and disposal of packaging accounted for during installation.			
Use scenario	The product is in active mode 100% of the time with a power use of 5W for 25000 Hours			
Geographical representativeness	Europe			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: China	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		LED Lamp for Enclosures - NSYLAMT5LD1					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	5.01E-04	4.91E-04	0*	0*	9.41E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.61E+00	4.17E-02	9.48E-04	0*	1.56E+00	8.02E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	7.09E-02	1.18E-02	2.18E-04	4.81E-05	5.86E-02	3.11E-04
Contribution to global warming	kg CO ₂ eq	2.21E+02	1.33E+01	2.08E-01	0*	2.07E+02	1.02E+00
Contribution to ozone layer depletion	kg CFC11 eq	5.16E-05	1.31E-06	0*	0*	5.02E-05	4.39E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	7.77E-02	3.73E-03	6.77E-05	0*	7.39E-02	8.73E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	2.59E+00	2.06E+00	0*	0*	5.39E-01	9.14E-04
Total Primary Energy	MJ	4.41E+03	2.14E+02	2.94E+00	0*	4.19E+03	5.29E+00

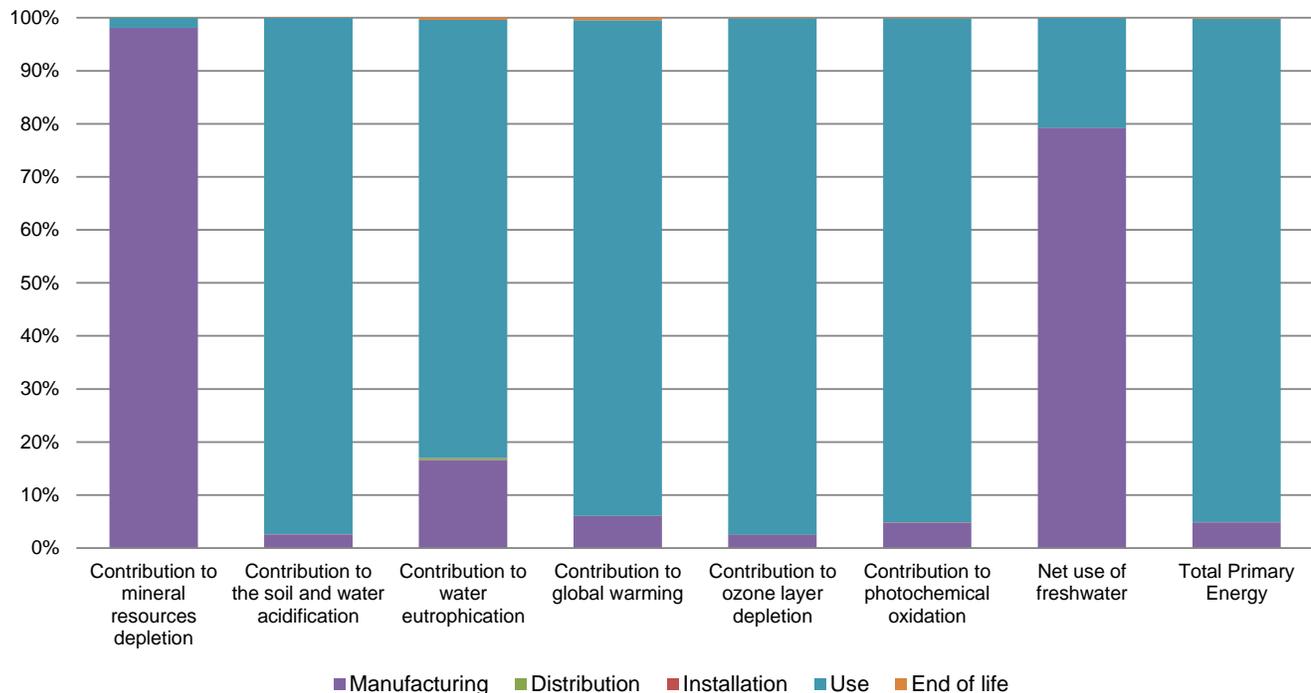

Optional indicators		LED Lamp for Enclosures - NSYLAMT5LD1						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	2.28E+03	1.47E+02	2.92E+00	2.62E-01	2.13E+03	3.31E+00	
Contribution to air pollution	m³	1.03E+04	1.38E+03	8.84E+00	1.49E+00	8.86E+03	3.20E+01	
Contribution to water pollution	m³	1.15E+04	1.91E+03	3.42E+01	3.06E+00	8.67E+03	9.03E+02	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	6.51E-01	6.51E-01	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	3.06E+02	6.36E+00	0*	0*	3.00E+02	0*	
Total use of non-renewable primary energy resources	MJ	4.10E+03	2.08E+02	2.93E+00	0*	3.89E+03	5.29E+00	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.02E+02	2.53E+00	0*	0*	3.00E+02	0*	
Use of renewable primary energy resources used as raw material	MJ	3.84E+00	3.84E+00	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.09E+03	1.95E+02	2.93E+00	0*	3.89E+03	5.29E+00	
Use of non renewable primary energy resources used as raw material	MJ	1.28E+01	1.28E+01	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	1.74E+01	1.44E+01	0*	0*	0*	2.99E+00	
Non hazardous waste disposed	kg	7.85E+02	1.19E+01	0*	0*	7.73E+02	0*	
Radioactive waste disposed	kg	6.37E-01	7.21E-03	0*	0*	6.30E-01	0*	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	8.53E-01	8.21E-02	0*	2.65E-01	0*	5.06E-01	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	5.14E-02	0*	0*	0*	0*	5.14E-02	
Exported Energy	MJ	7.60E-04	7.14E-05	0*	6.88E-04	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2020-12 in compliance with ISO14044.

The Manufacturing phase is impacting on Indicator of Abiotic depletion (elements, ultimate ultimate reserves) (ADPe) and The use phase is the life cycle phase which has the greatest impact on the rest of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2202002_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	09/2022	Supplemented by	PSR-0014-ed1.0-EN-2018 07 18
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVPEP2202002_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

09/2022