



Zaślepki ZMG - do otworu

materiał: poliamid 6.6

kolor: szary RAL7035


temp. montażu: -10°C +60°C

temp. pracy: -40°C do +85°C

dla panelu o grubości: 0,8 - 3,2 mm

palność: UL-94 V2

tolerancja: ±5%

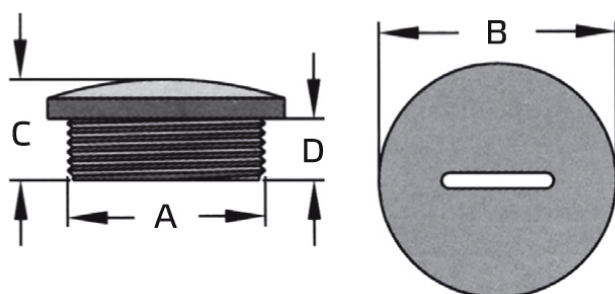

TYP	ROZMIAR GWINTU	WYMIARY [mm]				OPAKOWANIE [szt]	
		A	B	C	D		
ZMG-12	M12 x 1,5	11,7	15,0	10,0	6,0	10	☐
ZMG-16	M16 x 1,5	15,7	20,0	10,5	6,0	10	☐
ZMG-20	M20 x 1,5	19,9	24,0	10,5	6,0	10	☐
ZMG-25	M25 x 1,5	24,7	29,7	12,8	7,8	10	☐
ZMG-32	M32 x 1,5	31,7	36,6	13,3	7,8	10	☐
ZMG-40	M40 x 1,5	39,9	45,8	13,4	7,8	5	☐
ZMG-50	M50 x 1,5	49,4	55,5	16,2	9,8	5	☐
ZMG-63	M63 x 1,5	62,4	69,3	17,5	11,8	5	☐

RoHS
Compliant

HF
Halogen Free



złącz

TRYTYT.COM!