

10422000	DATA SHEET	
Valid from: 04.04.2024	EPIC® H-A 3 AG	

Description

- Compact housing for power supply in the smallest place.



General Characteristics

Series	H-A 3
Version	Panel mount base
Locking	Single lever
Protection rating (DIN EN 60529)	IP 67 (latched)
Protection rating (NEMA 250, UL50E)	4, 12 (latched)
Temperature Range	-40°C to +100°C, short term up to +125°C

Materials / Surfaces

Housing	PA-GF, V-0 acc. to UL 94
Locking lever	PA-GF, V-0 acc. to UL 94
Sealing	NBR

Approvals

VDE-Approval, VDE-REG.-Nr.	B437
UL-Approval, E-File-Number	E75770

Standard

Harmonised standard	DIN EN 60529
Safety standard	IEC 61984


Versions

Article number	Article description	Color
10422000	EPIC® H-A 3 AG	Grey (RAL 7035)
10422200	EPIC® H-A 3 AG BK	Black (RAL 9005)

Creator: TODV1/BU EPIC Released: VACH1/BU EPIC	Document: DB10422000EN Version: 04	Page 1 of 2
---	---------------------------------------	-------------

10422000	DATA SHEET	
Valid from: 04.04.2024	EPIC® H-A 3 AG	

Technical Drawings

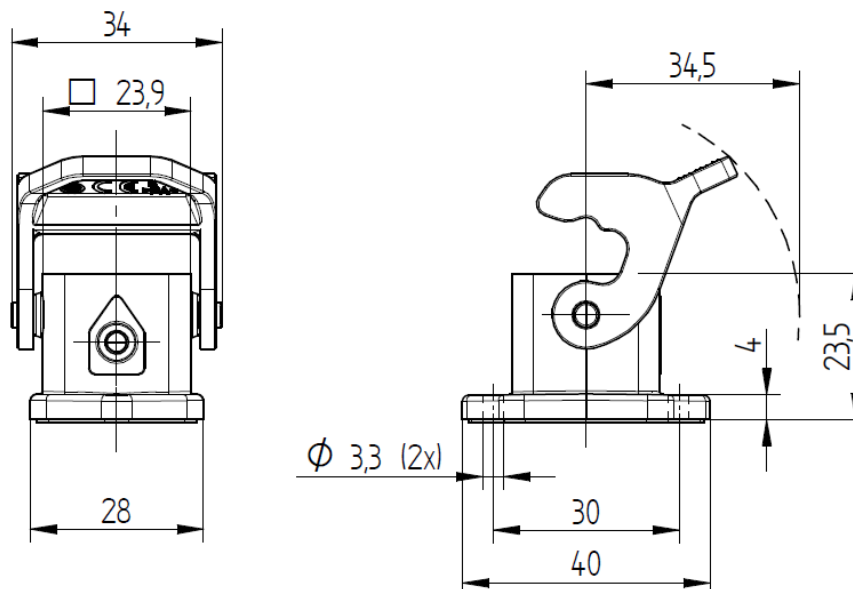

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Application range

Machine and equipment manufacturing, control engineering, electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: TODV1/BU EPIC Released: VACH1/BU EPIC	Document: DB10422000EN Version: 04	Page 2 of 2
---	---------------------------------------	-------------